



# INSTRUCTIONS

-J00558

REV. 2006-09-21

## TOURING SEATS

### GENERAL

#### Kit Number

51157-04, 51615-99C, 51617-99C, 51093-04A, 52976-05, 52609-05, 51630-06, 51726-05, and 52398-07

#### Models

For the most up-to-date model fitment information, please see product label or [www.harley-davidson.com](http://www.harley-davidson.com).

#### Kit Contents

See the Service Parts section for a list of the kit contents.

### INSTALLATION

#### NOTE

When performing the following installation procedures, avoid scratching painted surfaces (fender, tank, etc.) with tools or metal seat tabs.

1. Remove left saddlebag from motorcycle. Save all hardware for reinstallation. Remove existing grab strap from left side of vehicle by removing bolt and forward saddlebag mounting bracket. Note the mounting orientation of the grab strap, saddlebag mounting bracket and hardware for installation of the new grab strap.
2. Secure new grab strap to left side of vehicle by reassembling forward saddlebag mounting bracket and bolt to vehicle in same orientation as they were removed. Tighten bolt enough to hold assembly in place.
3. Remove stock seat from motorcycle.

#### For FLHR/I Models:

- a. Remove screw (with lockwasher) and nylon flat washer from rear of passenger pillion. Pull pillion rearward to remove pillion from motorcycle. Retain screw (with lockwasher) and nylon washer.
- b. Remove seat mounting studs securing rider seat to fender. Remove seat from motorcycle.

#### For FLHRC/I, FLHX and FLHRS/I Models:

- a. Remove screw (with lockwasher) and nylon flat washer from rear of the seat. Pull seat rearward to remove seat from motorcycle. Retain screw (with lockwasher) and nylon washer.
4. Remove rear seat bracket from the stock seat if the accessory seat does not have a rear seat bracket.
  5. Install stock rear seat bracket on new seat.
  6. Install new seat making certain that bracket on front of seat fully engages into seat mounting tab on frame.


7. Secure seat onto rear fender using nylon washer and screw (with lockwasher) removed in step 3.

### WARNING

After installing seat, pull upward on seat to be sure it is locked in position. While riding, a loose seat can shift causing loss of control, which could result in death or serious injury. (00070b)

8. Repeat Steps 1 and 2 for right side of motorcycle.
9. Reposition saddlebags (left and right) into place and secure by using original bail studs.
10. Tighten forward saddlebag mounting bolts to 120 in-lbs (13.5 Nm).

### SERVICE PARTS

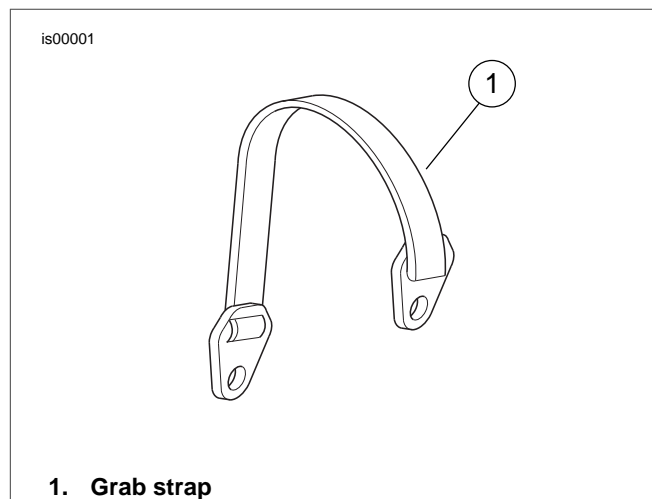

1. Grab strap

Figure 1. Service Parts: Touring Seats (-J00558)

Table 1. Service Parts: Touring Seats (-J00558)

ITEM	DESCRIPTION	PART NUMBER
1	Kits 51615-99C, 51617-99C, 51093-04A, 51630-06, 51726-05	51192-94
	Kit 51157-04, 52609-05	51104-01
	Kit 52976-05	52977-05
	Kit 52398-07	51880-07
2	Seat (not shown)	Not sold separately
3	Leather Care Kit (included with Kit 52398-07 only) (not shown)	Not sold separately