



# INSTRUCTIONS

-J03569

REV. 10-07-2004

Kit Number 58562-96A

## SPLASH SHIELD KIT

### General

This kit is designed for models equipped with Engine Guard Kit, Part No. 49004-90 or 49004-00.

| QTY | DESCRIPTION               | PART NO.            |
|-----|---------------------------|---------------------|
| 1   | Splash shield, right side | Not sold separately |
| 1   | Splash shield, left side  | Not sold separately |
| 2   | Amber reflectors          | 59256-84A           |

#### IMPORTANT NOTE

*Splash guards should not be used in temperatures above 50 degrees Fahrenheit. Engine cooling air flow will be affected and could lead to overheating and possible engine damage.*

#### WARNING

The rider's safety depends upon the correct installation of this kit. Use the appropriate service manual procedures. If the procedure is not within your capabilities or you do not have the correct tools, have a Harley-Davidson dealer perform the installation. Improper installation of this kit could result in death or serious injury. (00333a)

#### NOTE

A Service Manual for your model motorcycle is available from any Harley-Davidson dealer.

### Installation

1. Locate splash shield for left side. Bar and Shield should face forward and opening in splash shield should be on right side.
2. Slip splash shield on left side of engine guard.
3. Place the wide attaching strap around the frame down-tube, do not put strap over clutch cable.
4. Slip buckles on attaching strap onto mating buckle halves attached to back side of splash shield. Latches will snap into locked position when buckle is properly closed.

5. Adjust the fit by lifting the Velcro<sup>®</sup> attached straps (on rear of splash shield) and changing length as required.
6. Repeat procedure for right side of vehicle.

#### NOTE

*If splash shields cover amber reflectors mounted on frame down tubes, install reflectors included in kit as follows:*


7. See Figure 1. Clean areas on both sides of fender (1) where amber reflectors are to be mounted.
8. Remove backing paper from rear of reflector and place reflectors in position (2). Repeat for other side of fender.

#### WARNING

Federal Motor Vehicle Safety Standard (FMVSS) 108 requires motorcycles to be equipped with rear and side reflectors. Be sure rear and side reflectors are properly mounted. Low visibility of rider can result in death or serious injury. (00336a)

#### NOTE

*To remove splash shields depress both latches with thumb and forefinger and gently pull buckle apart. Open remaining buckle and slide splash shield off engine guard.*

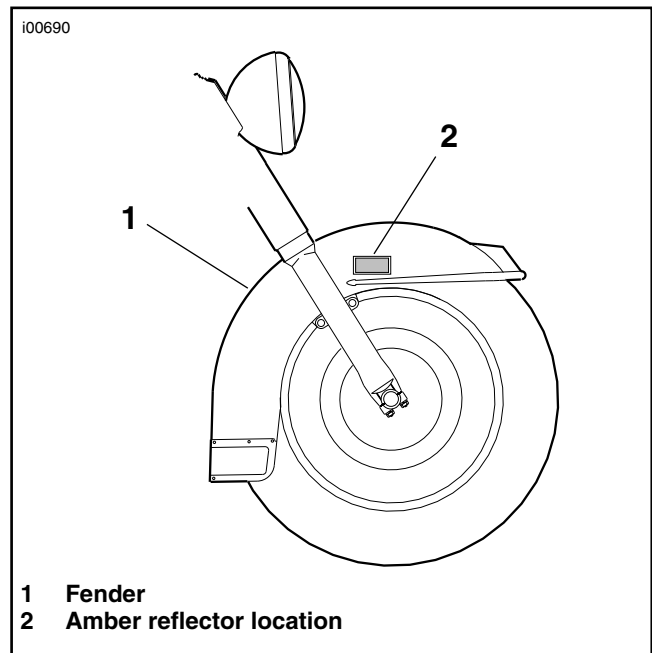

- 1 Fender
- 2 Amber reflector location

Figure 1. Mounting Amber Reflectors