



# INSTRUCTIONS

-J04512

REV. 2007-12-12

## HEADLAMP TRIM RING

### GENERAL

#### Kit Number

69972-08, 69973-08

#### MODELS

For model fitment information, please see the P&A Retail Catalog or the Parts and Accessories section of [www.harley-davidson.com](http://www.harley-davidson.com) (English only).

#### KIT CONTENTS

See Figure 2 and Table 1.


#### INSTALLATION

1. Loosen screw from the original equipment headlamp trim ring and remove ring.
2. Remove screw and nut from accessory trim ring assembly and set aside.
3. See Figure 1. If not already installed, place one rubber strip (2) inside trim ring (1) as shown.
4. See Figure 2. Insert the glass lens assembly (A) inside rubber strip (4) and trim ring (3), as shown.

#### NOTE

*Rotating the lens may help insertion.*

5. Install trim ring onto the main lamp housing (B). Assemble nut (2) and screw (1). Tighten securely.

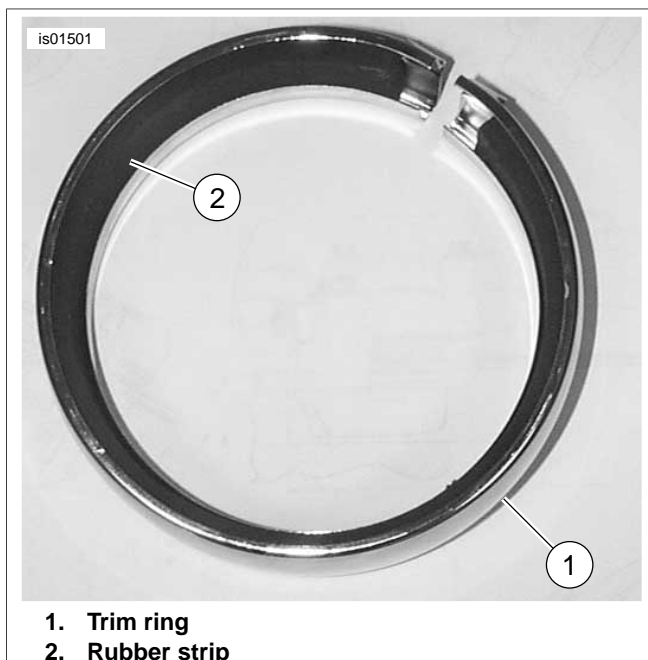

1. Trim ring
2. Rubber strip

Figure 1. Installed Rubber Strip

### SERVICE PARTS

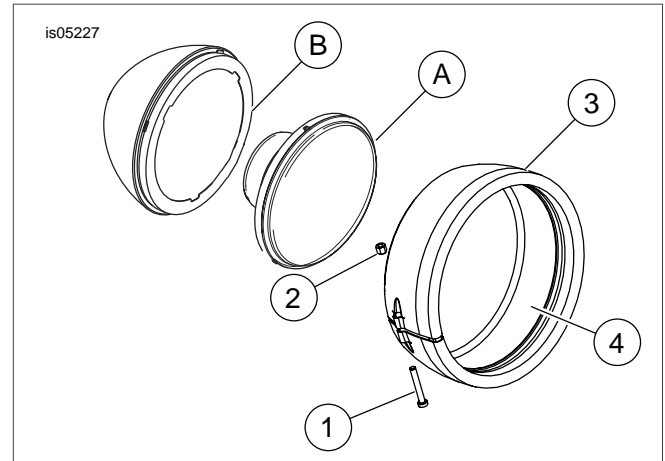


Figure 2. Service Parts: Headlamp Trim Ring

Table 1. Service Parts Table

Item	Description (Quantity)	Part Number
1	Screw	4560M
2	Nut	8006
3	Trim Ring	Not Sold Separately
4	Rubber strip	69679-00
<b>Items mentioned in text, but not included in kit:</b>		
A	Glass lens assembly	
B	Main lamp housing	